


CANAAN CENTER ROAD BRIDGE

BRIDGE No: WAY-CR 51-2.58



SOUTH APPROACH

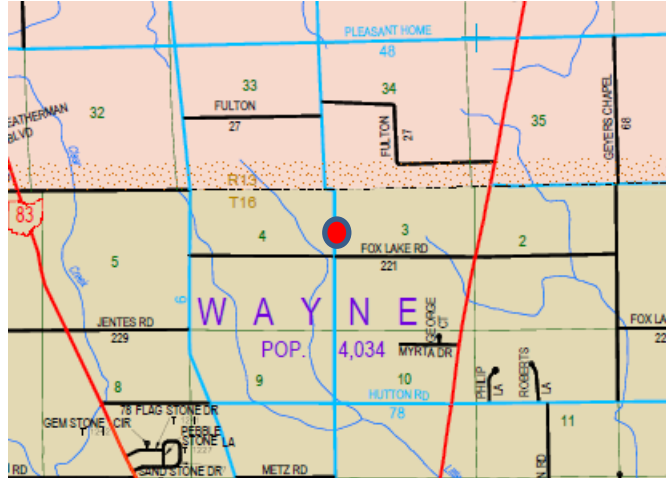

ELEVATION

LOCATION: Canaan Center Road over Little Apple Creek; 300 feet North of Fox Lake Rd. (CR 221)

EXISTING STRUCTURE: Single-Span Wood Deck/Steel Stringer and Concrete Abutment with H-Piles.
Deck Width = 19.2' Toe to Toe of Concrete Railing

PROPOSED STRUCTURE: 18'-0" (15.5'-0" clear span) precast concrete box beam on existing concrete abutment with H-Pile.
Deck Width = 21'-0" Face to Face Railing

PROJECT FINANCING: Force Account (Local K-Funds; Auto License & Gas Tax Funds)

ESTIMATED COST: \$40,706.00

REASON: Structurally Deficient

CONTRACTOR: County Crew